



Features

- . Input 90V to 264VAC, 50~60Hz suitable for worldwide use
- . Output voltage optional from 3.3V to 48Vdc constant voltage
- . Protections: Short Circuit / Overload / Over Voltage Protection
- . 100% full load burn-in test for 2Hrs to make every unit reliable.
- . All using 105°C long life electrolytic capacitors
- . Cooling by free air convection, operating temperature -30~50°C
- . Long life and high reliability design with 3 years warranty
- . Low no load power consumption <0.1W and efficiency upto 91%

Safety Standards

- . IEC62368-1 CB report for worldwide use
- . UL62368-1 + CAN/CSA 62368-1 for USA and Canada
- . EN 62368-1:2014/A11:2017 for European Union
- . AS/NZS 62368.1:2018 for Australia and New Zealand
- . J62368-1 for Japan and GB4943.1 for China market.



Product Description:

It is a highly reliable and quality 65W open frame temperature control unit power supply solution with wide range 90-264Vac input and designed strictly according to the international safety standards. The entire series supplies different models with output voltages ranging between 3.3Vdc and 48Vdc that can satisfy the demands for various types of temperature control unit, electronic instrument, household electronic device, communication device and so on. The 65W open frame type switching power supply solution is built-in full protections of over load / short circuit and over voltage with low no load power consumption <0.1W and high efficiency up to 91%. The entire series can operate at the ambient temperature between -30 and 50°C without any derating under air convection.

Technical Specification

Typ. Model	KEPS-65S-3.3	KEPS-65S-5	KEPS-65S-12	KEPS-65S-24	KEPS-65S-48
Output					
Output Voltage	3.3VDC	5VDC	12VDC	24VDC	48VDC
Rated Current	10A	10A	5.42A	2.71A	1.36A
Current Range	0 ~ 10A	0 ~ 10A	0 ~ 5.42A	0 ~ 2.71A	0 ~ 1.36A
Output Power	33W Max.	50W Max.	65W Max.	65W Max.	65.3W Max.
Voltage Tolerance	±3%	±3%	±2%	±2%	±2%
Ripple & Noise	100mVp-p	100mVp-p	150mVp-p	250mVp-p	350mVp-p
Input					
Input voltage	90 - 264Vac or 120- 370Vdc				
Input Frequency	50-60Hz (When the input is AC)				
Input Current	1.5A Max. @ 100 ~240Vac 50/60Hz input				
Inrush Current	50A Max. @ 100 ~240Vac 50/60Hz input				
Efficiency (Typ.)	80%	84%	88%	90%	91%
Leakage Current	≤0.25mA @ full input range				
Protections					
Over current	115~150% rated output power. Auto-Recovery when the fault is removed				
Short Circuit	No damage. Auto-Recovery when the fault is removed				
Over temperature	Shut down o/p voltage, re-power on to recover				
Environmental					
Operation Temperature	-30°C to +50°C, 20%RH to 90%RH				
Storage Temp, Humidity	-45~ +85°C, 10%RH to 95%RH				
Operation Altitude	≤5000m @ full load and rated operating temperatures				
MTBF	≥50000Hrs @ full load and rated operating temperatures				
Mechanical					
Dimensions (L x W x H)	76.2 x 50.8 x 24.0mm (3.00 x 2.00 x 0.95 inch)				
Unit Weight	110g±5 grams				
Packing Information	120pcs/ Carton, carton dimensions:47*37*20cm, 14.5kgs/ Carton				

TEST REPORT

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDIDTION	RESULT	VERDICT
1	RIPPLE & NOISE	100mVp-p (Max)	I/P:230VAC / O/P:FULL LOAD / Ta:25°C	80mVp-p	P
2	VOLTAGE TOLERANCE	-2% ~ +2% (Max)	I/P:90VAC~264VAC O/P:FULL~MIN. LOAD / Ta:25°C	-1% ~ +1% of output voltage	P
3	LINE REGULATION	-1% ~ +1% (Max)	I/P:90VAC ~264VAC O/P:FULL LOAD / Ta:25°C	-0.06% ~ +0.18% of output voltage	P
4	LOAD REGULATION	-1% ~ +1% (Max)	I/P:230VAC O/P:FULL ~MIN LOAD / Ta:25°C	-0.59% ~ +0.59% of output voltage	P
5	OVER/UNDERSHOOT	<±5%	I/P: 230VAC O/P:FULL LOAD / Ta:25°C	1.0%	P
6	SET UP TIME	500 mS (Max)	I/P:230VAC O/P:FULL LOAD / Ta:25°C	390 mS	P
7	RISE TIME	30 mS (Max)	I/P: 230VAC O/P:FULL LOAD / Ta:25°C	26 mS	P
8	HOLD UP TIME	12 mS (Min)	I/P: 115VAC O/P:FULL LOAD / Ta:25°C	15 mS	P

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDIDTION	RESULT	VERDICT
1	VOLTAGE RANGE	90VAC~264VAC	I/P:TESTING O/P:FULL LOAD / Ta:25°C	83V~264V	P
2	FREQUENCY RANGE	50HZ - 60HZ (Typ) NO DAMAGE OSC	I/P: 100VAC ~ 240VAC O/P:FULL~MIN LOAD / Ta:25°C	TEST: OK	P
3	EFFICIENCY	84% (Typ)	I/P:230VAC O/P:FULL LOAD / Ta:25°C	84.65%	P
4	AVERAGE EFFICIENCY	>82%	I/P:115/230VAC & O/P:25%、50%、75%、100% LOAD & Ta:25°C	82.39% (115VAC) 82.93% (230VAC)	P
5	AC CURRENT	1.5A (Max)	I/P:100VAC & O/P:FULL LOAD Ta:25°C	1.12A	P
6	INRUSH CURRENT	<50A COLD START	I/P: 230VAC / O/P:FULL LOAD Ta:25°C	40.01A	P
7	LEAKAGE CURRENT	< 0.25mA	I/P:240VAC & O/P:Min LOAD Ta:25°C	L-FG:0.163mA N-FG:0.163mA	P

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDIDTION	RESULT	VERDICT
1	OVER LOAD PROTECTION	115 ~ 150% (Typ)	I/P:230VAC & O/P:TESTING Ta:25°C	139.6% HICCUP MODE	P
2	OVER VOLTAGE PROTECTION	115 ~ 135% (Typ)	I/P:230VAC O/P:MIN LOAD & Ta:25°C	Hiccup mode ,recovers automatically after fault condition is removed	P
3	SHORT PROTECTION	SHORT OUTPUT 1 HOUR NO DAMAGE	I/P:264VAC O/P:FULL LOAD & Ta:25°C	NO DAMAGE HICCUP MODE	P


SAFETY TEST & E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDIDTION	RESULT	VERDICT
1	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC/min I/P- FG: NA O/P-FG:NA	I/P-O/P: 3.6 KVAC/min I/P-FG: NA O/P-FG: NA Ta:25°C	I/P-O/P:3.88mA I/P-FG: / O/P-FG: / NO DAMAGE	P
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 9999MΩ I/P-FG: 9999MΩ O/P-FG:9999 MΩ NO DAMAGE	P
3	CONDUCTION	BS EN/EN55032(CISPR32), FCC PART 15 / CISPR22 CAN	I/P: 230 VAC (50HZ) O/P: FULL/50% LOAD Ta: 25°C	PASS Test by certified Lab	P
4	RADIATION	BS EN/EN55032(CISPR32), FCC PART 15 / CISPR22 CAN	I/P: 230 VAC (50HZ) O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab	P
5	SURGE	BS EN/EN61000-4-5 LIGHT INDUSTRY L-N: 1KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA B	P
6	E.S.D	BS EN/EN61000-4-2 LIGHT INDUSTRY AIR: 8KV / Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA B	P

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	ZHU LI	WANG LW	ZHANG DL

■ Mechanical Specification

Unit:mm

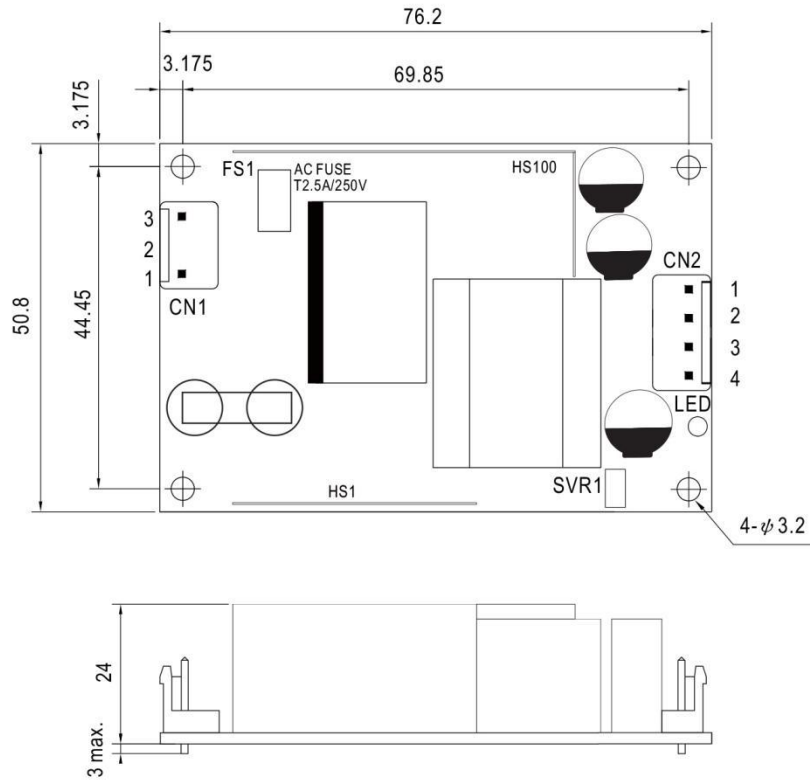

AC Input Connector (CN1) : JST B3P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	AC/N	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
2	No Pin		
3	AC/L		

DC Output Connector (CN2) : JST B4P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	+V	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
2	+V		
3	-V		
4	-V		